



Compleo 3-in-1

ADHESIVE, PATCH AND BASE MORTAR



TECH DATA

Compleo 3-in-1 - Adhesive, Patch and Base

Mortar is a cement based compound designed for jointing Compleo AAC Panels, patching minor damage sustained by Compleo AAC Panels and a strong base mortar for levelling the floor for Compleo panels. Compleo 3-in-1 has a working time of 45 minutes with a 60 minute setting time.



Performance

Mixing

Wets out quickly and mixes easily by hand or electric mixer for a smooth, creamy consistency.

Trowelling

Easy to trowel. Has good body on the trowel and on the hawk.

Setting Time

Working time requires that only enough be mixed for the number of panels that would be installed within 45 minutes.

Drying

Quick drying means less waiting before plasterboard can be direct fixed to Compleo panels.

Strength

A hard setting cementitious compound providing the strongest joint between panels, a robust patch to damaged parts of a panel and a strong level base to set Compleo panels down on.

Benefits

- One compound for three applications. Jointing, repairing and base setting.
- Easy to mix and apply
- Creates strong joints, robust patching and solid load bearing bases.

Product Information

SIZE	20 kg paper bag		
TYPE	Cement based adhesive, patch and mortar compound.		
MIXING RATIO	1 L of water to 4 kg of Compleo Adhesive & Patch		
WORKING TIME	45 - 60 minutes		
SETTING TIME	60 minutes		
SYSTEM USAGE	<input checked="" type="checkbox"/> Jointing	<input checked="" type="checkbox"/> Patch	<input checked="" type="checkbox"/> Base mortar
	<input checked="" type="checkbox"/> Standard	<input checked="" type="checkbox"/> Fire rated	<input checked="" type="checkbox"/> Wet area systems

February 2014





Compleo 3-in-1

ADHESIVE, PATCH AND BASE MORTAR

KNAUF


TECH DATA

Application

- ▶ Compleo 3-in-1 - Adhesive, Patch and Base Mortar is suitable for dry and wet areas and where a fire resistance level is specified.
- ▶ Always use clean tools and containers.
- ▶ Pour the required amount of clean tap water into a container. Add the powder into water, mixing continuously to a thick, creamy consistency. Soaking is not recommended.
- ▶ Only mix enough Compleo 3-in-1 to be used in 45 minutes and do not contaminate with previously mixed batches. Once the material starts to set it cannot be remixed.
- ▶ Ensure Compleo 3-in-1 is smoothed out before direct fixing plasterboard to Compleo panels or before installing steel frame for plasterboard.
- ▶ Ensure Compleo 3-in-1 is set and dry before plasterboard is direct fixed to Compleo panels. This avoids excess moisture from the compound being absorbed by the plasterboard.

Optimise product performance by:

- ▶ Storing in a dry, well ventilated environment fully protected from the weather.
- ▶ Washing tools before product dries and hardens.
- ▶ Ensuring Compleo 3-in-1 does not dry out before setting has taken place under severe hot dry conditions.

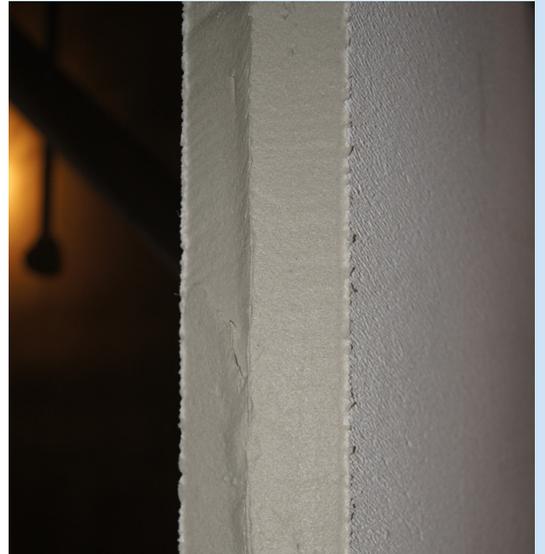

Warranty

Knauf's products are guaranteed by a 10 Year Warranty. For details visit:

knaufplasterboard.com.au
knaufplasterboard.co.nz

Technical Advice

AU **1300 724 505**
NZ **0800 884 326**

